

# D-550 'SUPER-PAVER'

1

<b>RIGHT SIDE DEPTH</b>	<b>LEFT SIDE DEPTH</b>	<b>THROTTLE OPEN</b>
<b>RIGHT SIDE EXTENSION</b>	<b>LEFT SIDE EXTENSION</b>	
<b>EXTENSION IN</b>	<b>EXTENSION OUT</b>	<b>NOTICE</b> KEY MUST BE ON BEFORE OPERATING. PROpane TANK VALVE MUST BE OPEN BEFORE STARTING.
<b>SCREED UP</b>	<b>SCREED DOWN</b>	<b>IN OUT</b>
<b>SCREED LIFT</b>	<b>HITCH ARMS</b>	<b>UP DOWN</b>
<b>ENGINE PRIMER</b>	<b>PRESSURE SWITCH OVERRIDE</b>	<b>OPEN GATE</b>
<b>ELECTRONIC IGN. ON</b>	<b>OFF</b> <b>CLOSED</b>	<b>LEFT AUGER ON</b> <b>RIGHT AUGER ON</b>
<b>MAGENTO IGN. ON</b>		

**BUILT UNDER ONE OR MORE OF THE FOLLOWING PATENTS—**

U.S. PATENTS	CANADIAN PATENTS
3,515,411, 3,300,341, 286,701	1,361, 286,701
3,298,491, 3,137,451, 287,701	1,361, 287,701
3,204,101, 3,275,792, 803,711	1,361, 803,711
3,273,342, 3,238,516, 779,653	1,361, 779,653
3,330,142, 3,230,710, 803,709	1,361, 803,709
3,300,211, 3,648,377, 874,034, 856,674	1,361, 874,034, 856,674
3,704,754, 3,770,318, 3,797,195	1,361, 3,770,318, 3,797,195

2

3 **HOLD UP DURING ENGINE STARTING**

4 **ATTENTION**  
CHECK ENGINE OIL BEFORE STARTING. CHECK ENGINE OIL EVERY 4 HOURS DURING OPERATION.  
—CAUTION—  
DO NOT OVERFILL.

5 **MAX. TIRE PRESSURE 65 PSI**




**BATTERY INFORMATION**

NO. 21F DIMENS (L) (W) (H) HEIGHT

7 12V (L) 6 1/2 (W) 8 1/2 (H)

8 **SHIPPED WITH IHC HYDRAULIC OIL. PLEASE USE, DO NOT MIX OILS.**

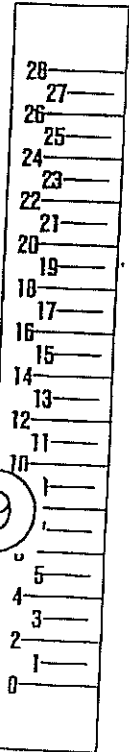

**CAUTION**  
BEFORE O **10** HIS VALVE **SHUT OFF**  
ALL OTHER PROPANE VALVES

**CAUTION**  
WHEN USING BRIDLE CHAINS TO LIFT **11**, **BE SURE** THEY ARE NOT CAUGHT UNDER THE AUGER

9

## DECALS

REF. NO.	PART NUMBER	DESCRIPTION	NO. REQ.
1	11761	SHEET OF MISCELLANEOUS DECALS	1
2	500-330	PATENTS	1
3	11982	HOLD UP / STARTING	1
4	11767	ATTENTION CHECK OIL	2
5	11622	TIRE PRESSURE	2
6	500-761	LAYTON MFG. CO.	2
7	11861	BATTERY INFORMATION	2
8	500-350	HYDRAULIC OIL	1
9	550-527	DEPTH INDICATOR SCALE	2
10	12005	PROPANE VALVES, CAUTION	4
11	12013	LIFT CHAINS, CAUTION	2
12	550-364	DECAL SET (INCLUDES ALL THE ABOVE)	2